


SHOP DRAWING - ARMATECH - BI-PARTING SLIDING DOOR

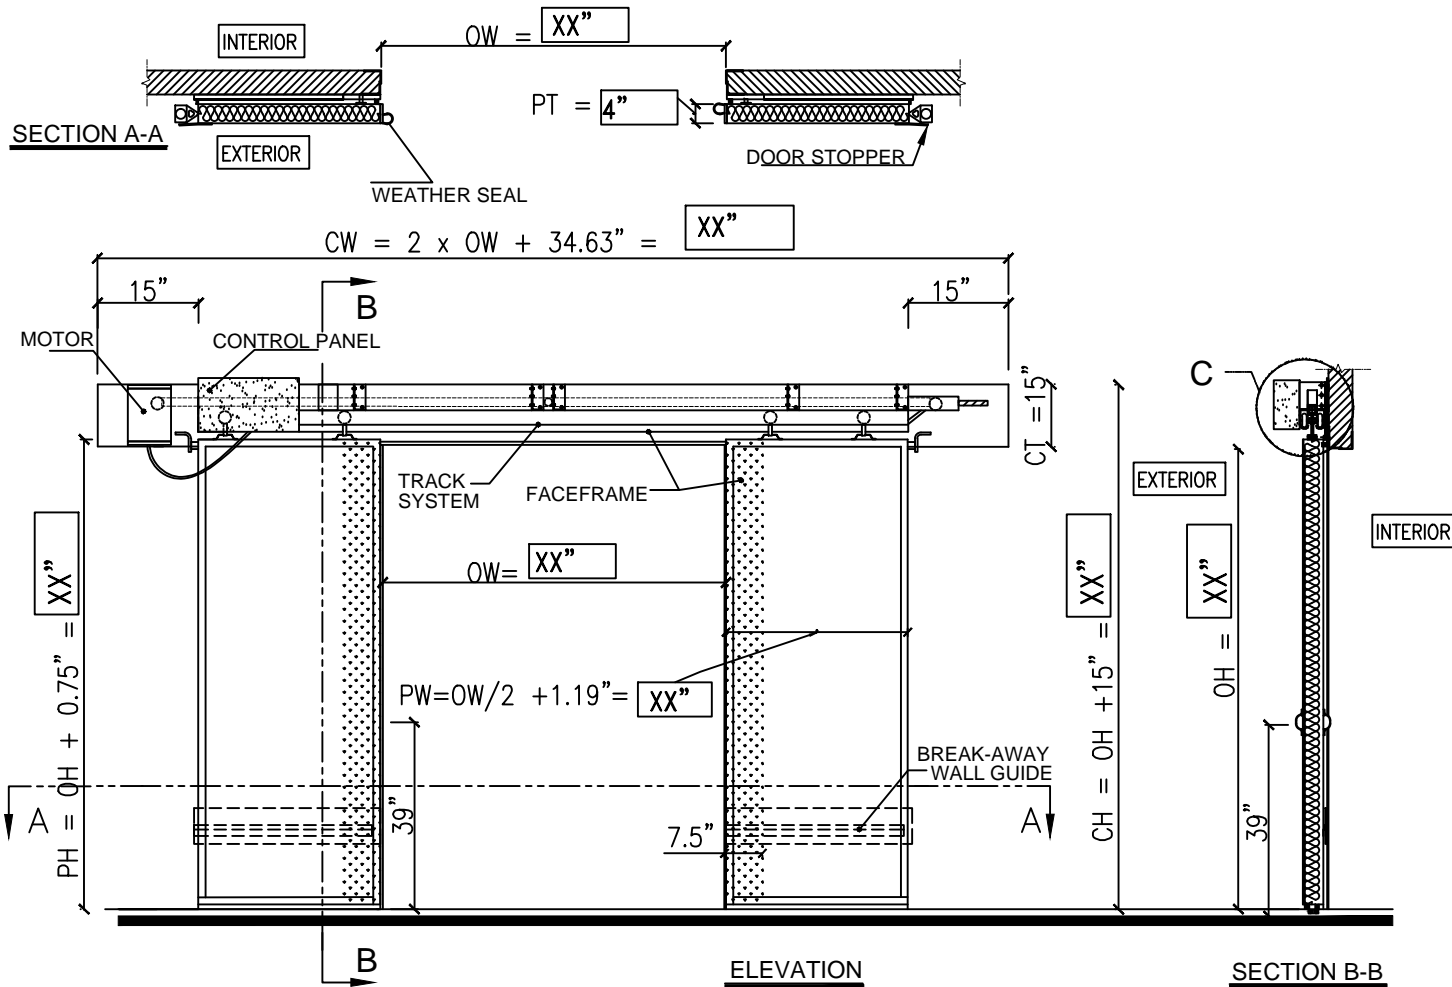

Specifications:

- Cooler (4°C & above / 38°F & above)
- Freezer (-30°C to 2°C / -22°F to 36°F)
- Heating cable on door frame and door panel

Standard Features:

- *4" (100mm) thick, impact-resistant panel. White finish. Thermoplastic composite skins both sides. Expanded polystyrene (EPS) foam core
- *Color: white
- *Inside and outside handles
- *Aluminium frame for door panels
- *Perimeter seals on door faceframe
- *Bottom double blade seal on door panel
- *Galvanized steel double track system
- *Break-away mechanism and wall guides
- *Medium speed brushless servomotor, up to 48 inches per second on opening, programmable soft-start soft-stop
- *Control panel with LCD/Keypad display system
- *Including driving mechanism & safety release system for manual operation

Activation Motor Accessories:

- Pull Cords cooler (2 standards)
- Pull Cords freezer (1 standard + 1 heated)
- Push button Open/Stop/Close
- Motion Detector (2 systems / door)

Options:

- Back frame

Notes:

- 1) If the door is a freezer door, it is to be installed on the ambient side (4°C & above / 38°F & above) outside of freezer room
- 2) Heat trace, when applicable, requires 115V power and 15A outlet

DIMENSIONS	QTY	CLEAR OPENING		REQUIRED CLEARANCE			DOOR PANELS		
		WIDTH (OW)	HEIGHT (OH)	WIDTH (CW)	HEIGHT (CH)	TOP (CT)	WIDTH (PW)	HEIGHT (PH)	THICKNESS (PT)
	X	XX"	XX"	XX"	XX"	15"	XX"	XX"	4"

GLACE-GUARD
Cold Storage Doors

THERMOSTOP INC.

3775, boulevard Losch, Longueuil (Québec), Canada J3Y 5T7,
Tel.: (450) 678-8666, Fax: (450) 678-7765, www.thermostop.com

Distributor: XXXXXX	Date: XX/XX/XXXX	Drawn by: J.P.	Verify by: L.H.	Page: 1/1	Note: *Drawings not to scale
Customer: XXXXXX	Revision:	Please confirm motor Spec.: _____ V _____ HZ			
Approved for manufacturing by:	Date:				

Legend

OW = OPENING WIDTH
OH = OPENING HEIGHT
CW = CLEARANCE WIDTH
CH = CLEARANCE HEIGHT
CT = CLEARANCE TOP
PW = PANEL WIDTH
PH = PANEL HEIGHT
PT = PANEL THICKNESS