


# SHOP DRAWING - GLACE-GUARD ENTRANCE ET-400 - WAREHOUSE DOOR

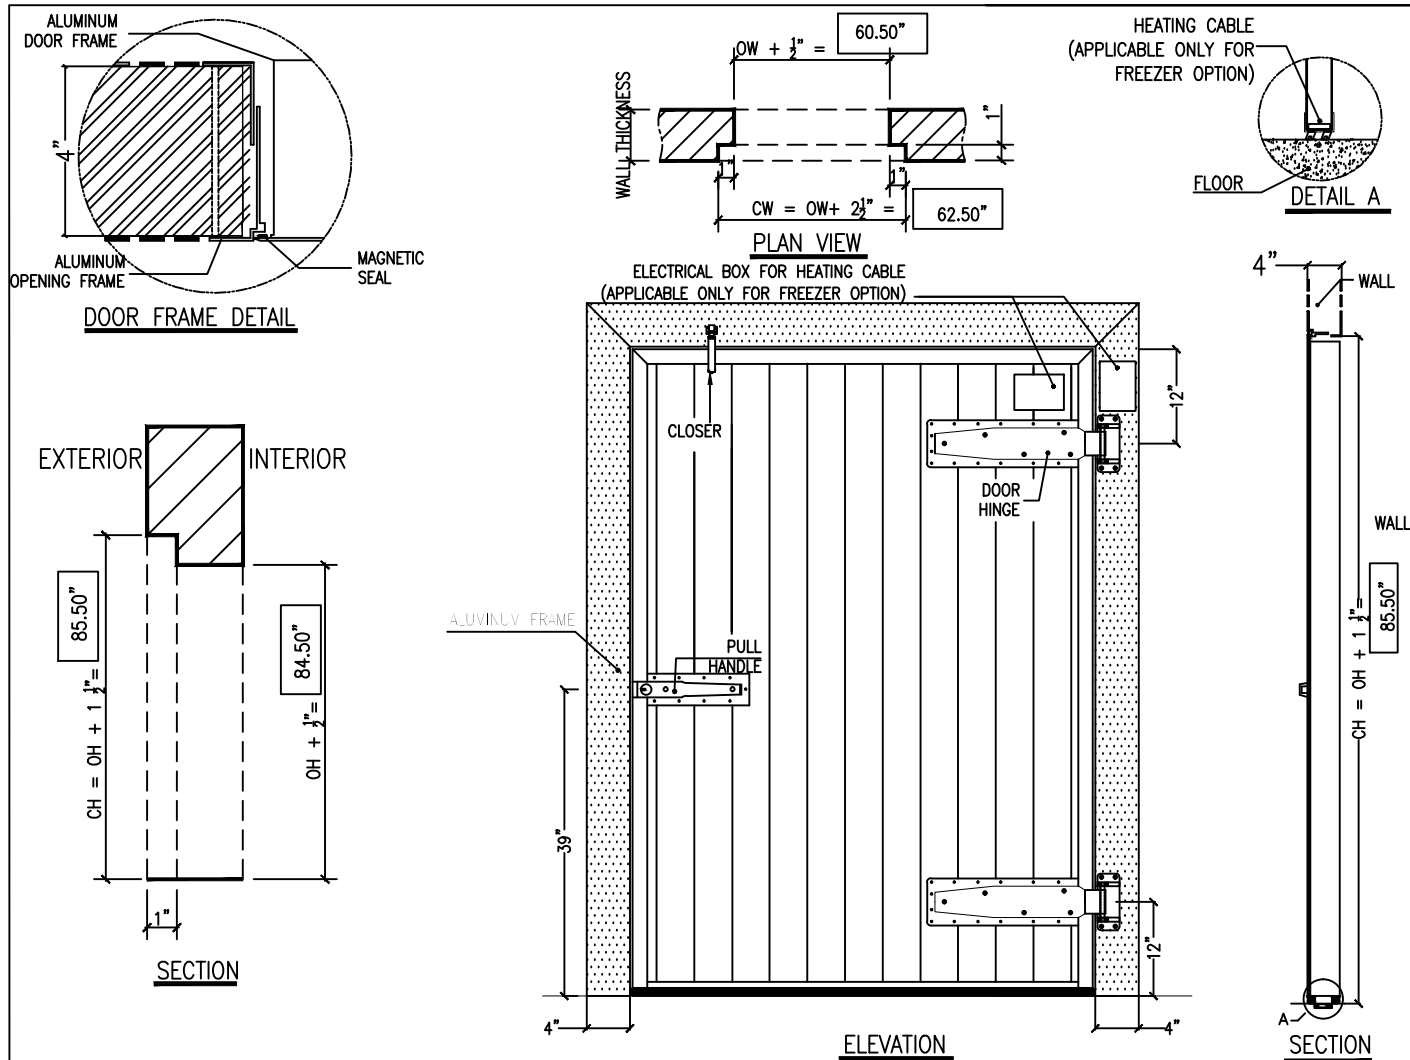

- Specifications:**
- ET-400 : 4"(100mm)
  - Cooler (4°C and above / 38°F and above)
  - Freezer (-30°C to 2°C / -22°F to 36°F)
  - Heating cable on four (4) sides
  - Right side hinges viewed from the outside
- NOTE:** HINGES CAN BE ON THE RIGHT SIDE OR ON THE LEFT SIDE AS PER USER REQUIREMENT

- Standard Features:**
- \*Mirror frame in 2 pieces
  - \*Polyurethane insulated panels
  - \*26ga steel, white stucco embossed finish
  - \*Heavy-duty  $\frac{5}{32}''$  (4mm) aluminium opening frame in two extruded angles
  - \*Magnetic seals on door frame perimeter.
  - \*Bottom double blade seal on door panel.
  - \* 2 (two) 21" cam-lift hinges.
  - \* 1 (one) pull handle.
  - \* 1 (one) mechanical closer.

- Options: NONE INCLUDED**
- INTERIOR HANDLE
  - FLOOR STOPPER
  - TAMPER PROOF SCREWS
  - Panic Bar
  - Window: triple thermo glass clear 12"x24"x  $\frac{1}{8}''$
  - Kick plate made of  $\frac{1}{8}''$  aluminium checker plate x 24" high x one side

DIMENSIONS	QTY	FINISHED OPENING		REQUIRED CLEARANCE		APPROVED FOR MANUFACTURING BY:	
		WIDTH (OW)	HEIGHT (OH)	WIDTH (CW)	HEIGHT (CH)	Name:	Date:
		X	60"	84"	62.50"	85.50"	Signature:

**Legend**

OW = OPENING WIDTH  
 OH = OPENING HEIGHT  
 CW = CLEARANCE WIDTH  
 CH = CLEARANCE HEIGHT

**GLACE-GUARD** Cold Storage Doors      **THERMOSTOP INC.**      3775, boulevard Losch, Longueuil (Québec), Canada J3Y 5T7, Tel.: (450) 678-8666, Fax: (450) 678-7765, www.thermostop.com

Distributor: XXXXX	Date: XX/XX/XXXX	Drawn by: X.X.	Verify by: L.H.	Page: 1/1	<b>Note :</b> *Drawings not to scale
Customer: XXXXX	Revision:				